

Reliable Smoke Detection in Metro Tunnels and Stations

Underground metro tunnels are difficult to access for firefighting, so a small fire in this environment can lead to disaster. The panic of passengers trapped underground adds to the complexity and significance of a fire event. For example, a fire due to an electrical fault on a train in Baku Metro in Azerbaijan killed 285 and injured 265 people — 245 people were killed on the train and 40 were killed in the tunnel.

Fire Detection Challenges

- Limited time for installation
- Difficult access for detector maintenance, testing and replacement
- Risk of fire from sparks on oil, grease and paper
- Electric wiring and switchgear
- Minimum downtime
- Rapid air movement when trains pass
- Difficult evacuation due to narrow tunnels and large crowd
- Poor ventilation and visibility
- Risk of asphyxiation by smoke in confined tunnel space
- False alarms due to vibrations and building/tunnel movement from moving trains

Conventional Detection Technologies

Various fire detection technologies have been deployed in tunnels. Aspirating smoke detectors (ASDs) provide the fastest and most reliable detection in tunnels and other harsh environments, but they may not be cost-effective if very early warning is not the priority. Heat cable is false-alarm free but only operates in the late stage of a fire. Beam detectors have provided an adequate compromise for smoke detection in long and narrow tunnels, but IR-only projected-beam smoke detectors are susceptible to building movement and prone to false alarms due to dust and object intrusion. They also are difficult to align and therefore time consuming to install.




Reinventing Detection for Large, Open Spaces — Open-area Smoke Imaging Detection (OSID) by Xtralis

OSID by Xtralis overcomes common fire detection challenges faced in metro tunnels and stations with its unique, patented dual-wavelength multi-beam technology. In its simplest configuration, a system consists of one Emitter and one Imager placed on opposite walls, roughly aligned with one another.

OSID offers many advantages over traditional beam and spot detectors, the primary one being the use of dual light frequencies. Ultraviolet (UV) and infrared (IR) wavelengths, which are outside the range visible to humans, assist in the identification of real smoke compared to larger objects such as insects and dust, thus reducing false alarms. Furthermore, OSID is equipped with a CMOS imaging chip with many pixels rather than a single photodiode. This concept allows the Imager to provide simple alignment as well as excellent tolerance to building movement and vibration, without the use of moving parts.

Alignment of the Emitter is simple, achieved by using a low-cost laser alignment tool to rotate the optical spheres until the laser beam from the alignment tool is within proximity to the Imager. No further alignment is required, resulting in extremely fast installation and set-up, which is a major benefit in tunnels where access for installation is often limited to just a few hours at night.

The imaging chip also allows for the deployment of up to seven Emitters per Imager in large train halls. Only the Imager has to be wired versus every receiver as is the case with traditional beam detectors. Various Emitters also can be placed on different floors, providing detection both at the metro station's entrance level as well as above the train on the level below.

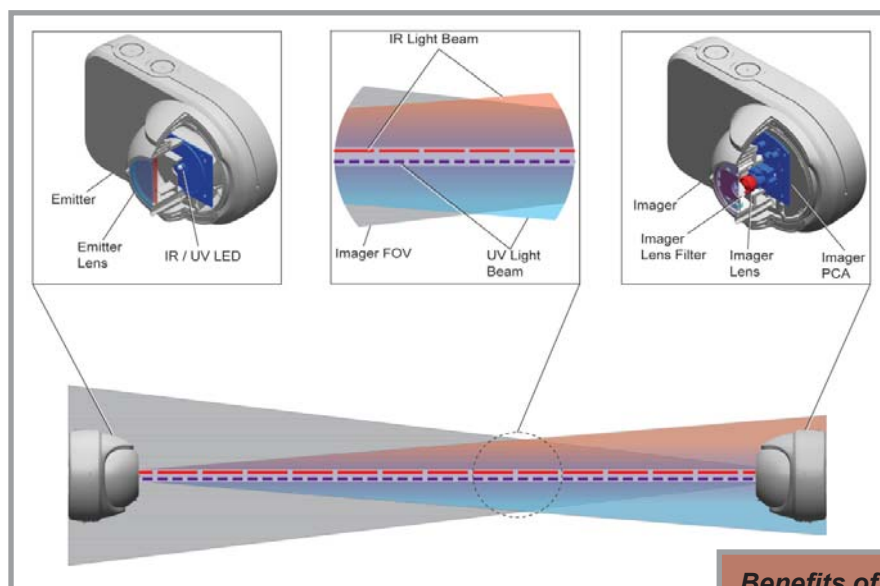

Benefits of OSID

- **Simple, quick installation**
- **Low false-alarm rate**
- **Long range up to 150 m (492 ft.)**
- **High resistance to dust and dirt**
- **High tolerance to vibration and structural movement**
- **High resistance to intruding objects**

www.xtralis.com

The Americas +1 781 740 2223 **Asia** +852 2916 8894 **Australia and New Zealand** +61 3 9936 7000
Continental Europe +32 56 24 19 51 **UK and the Middle East** +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.

Document: 19553_03

OSID
by  **xtralis™**